



Fe-Base Amorphous C Cutting Core

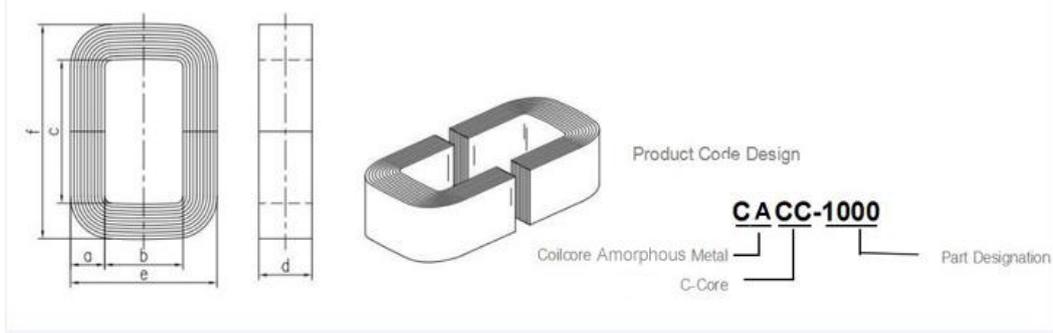

Core No.	Core Dimension										Performance Parameters				
	a(mm)	±	b(mm) ref*	c(mm) ref*	d(mm)	±	e(mm)	±	f(mm)	±	Im (cm)	Ac (cm ²)	Wa (cm ²)	Ap (cm ⁴)	Mass (g)
CACC-4	9.0	0.50	10.0	32.80	15.0	0.50	28.0	1.50	50.80	2.00	11.20	1.20	3.30	3.61	97
CACC-4	9.0	0.50	11.0	33.00	15.0	0.50	29.0	1.50	51.00	2.00	11.50	1.20	3.60	3.99	99
CACC-6.3	10.0	0.50	11.0	33.00	20.0	0.50	31.0	1.00	53.00	2.00	11.80	1.78	3.60	5.91	150
CACC-8	11.0	0.80	13.0	30.00	20.0	0.50	35.0	1.00	52.00	2.00	11.90	1.96	3.90	6.99	167
CACC-10	11.0	0.80	13.0	40.00	20.0	0.50	35.0	1.00	62.00	2.00	13.70	1.96	5.20	9.30	193
CACC-16A	11.0	0.80	13.0	40.00	25.0	0.50	35.0	1.00	62.00	2.00	13.70	2.45	5.20	11.65	241
CACC-16B	11.0	0.80	13.0	50.00	25.0	0.50	35.0	1.00	72.00	2.00	15.70	2.45	6.50	14.56	276
CACC-20	11.0	0.80	13.0	50.00	30.0	0.50	35.0	1.00	72.00	2.00	15.70	2.94	6.50	17.47	331
CACC-21	10.0	0.80	17.0	32.00	40.0	0.50	37.0	1.00	52.00	2.00	13.60	3.56	5.40	17.72	348
CACC-25	13.0	0.80	15.0	53.00	25.0	0.50	41.0	1.00	82.00	2.00	17.90	2.89	8.40	22.23	373
CACC-26	16.0	1.00	40.0	45.00	20.0	0.50	72.0	1.00	77.00	2.00	21.70	2.85	18.00	46.91	443
CACC-26B	16.0	1.00	20.0	50.00	20.0	0.50	52.0	1.00	82.00	2.00	18.70	2.85	10.00	26.06	382
CACC-32	13.0	0.50	15.0	56.00	30.0	0.50	41.0	1.00	82.00	2.00	17.90	3.47	8.40	26.68	447
CACC-32+	13.0	0.50	16.0	58.00	30.0	0.50	42.0	1.00	84.00	2.00	18.80	3.47	6.50	22.56	450
CACC-40	13.0	0.80	15.0	56.00	35.0	0.50	41.0	1.00	82.00	2.00	17.90	4.05	8.40	31.12	522
CACC-50	16.0	1.00	20.0	70.00	25.0	0.50	52.0	1.00	102.00	2.00	22.70	3.56	14.00	45.60	580
CACC-63	16.0	1.00	20.0	70.00	30.0	0.50	52.0	1.00	102.00	2.00	22.70	4.27	14.00	54.72	696
CACC-64	16.0	1.00	20.0	43.00	45.0	0.50	52.0	1.00	75.00	2.00	17.30	6.41	8.60	50.42	795
CACC-65	16.0	1.00	20.0	58.00	45.0	0.50	52.0	1.00	90.00	2.00	20.30	6.41	11.60	68.01	933
CACC-70	20.0	1.00	40.0	60.00	30.0	0.50	80.0	1.00	100.00	2.00	25.90	5.34	24.00	117.27	994
CACC-80	16.0	1.00	20.0	70.00	40.0	1.00	52.0	1.00	102.00	3.00	22.70	5.70	14.00	72.97	928
CACC-84	12.0	1.00	30.0	60.00	20.0	1.00	54.0	1.00	84.00	3.00	21.40	2.14	18.00	35.18	329
CACC-100	16.0	1.00	20.0	70.00	45.0	1.00	52.0	1.00	102.00	3.00	22.70	6.41	14.00	82.09	1043
CACC-117	20.0	1.00	35.0	77.00	20.0	1.00	75.0	1.00	117.00	3.00	28.30	3.56	27.00	87.79	724
CACC-128	22.0	1.00	35.0	84.00	25.0	1.00	79.0	1.00	128.00	4.00	30.40	4.90	29.40	131.68	1067
CACC-140	26.0	1.00	45.0	88.00	30.0	1.00	97.0	1.00	140.00	4.00	34.40	6.94	39.60	251.54	1716
CACC-140A	26.0	1.00	45.0	88.00	40.0	1.00	97.0	1.00	140.00	4.00	34.40	9.26	39.60	335.38	2287
CACC-168S	20.4	0.50	30.0	154.20	20.0	1.00	70.8	1.00	195.00	4.00	43.20	3.63	46.30	153.70	1127
CACC-125	19.0	1.00	25.0	83.00	35.0	1.00	63.0	1.00	121.00	3.00	27.20	5.92	20.80	112.37	1157
CACC-160	19.0	1.00	25.0	83.00	40.0	1.00	63.0	1.00	121.00	3.00	27.20	6.76	20.80	128.42	1322
CACC-180	25.0	1.00	35.0	65.00	30.0	1.00	85.0	1.00	115.00	3.00	27.90	6.68	22.80	138.95	1335
CACC-193	40.0	1.00	50.0	113.00	40.0	1.00	130.0	1.00	193.00	4.00	44.60	14.24	56.50	736.17	4565
CACC-200B	14.0	0.50	35.0	93.00	68.3	1.00	63.0	1.00	121.00	3.00	29.60	8.50	32.60	277.00	1771
CACC-200	19.0	1.00	25.0	83.00	50.0	0.50	63.0	1.00	121.00	3.00	27.20	8.46	20.80	160.53	1653
CACC-210	40.0	1.00	50.0	130.00	50.0	1.00	130.0	1.00	210.00	4.00	48.00	17.80	65.00	1058.66	6140
CACC-367S	25.8	1.00	67.0	97.80	25.0	0.50	118.6	1.00	149.40	4.00	40.50	5.74	65.50	344.18	1671
CACC-250	19.0	1.00	25.0	90.00	60.0	1.00	63.0	1.00	128.00	3.00	28.60	10.15	22.50	208.88	2085
CACC-260	23.7	1.00	25.0	78.00	40.0	1.00	72.4	1.00	125.40	3.00	28.00	8.44	19.50	150.54	1699

Fe-Base Amorphous C Cutting Core

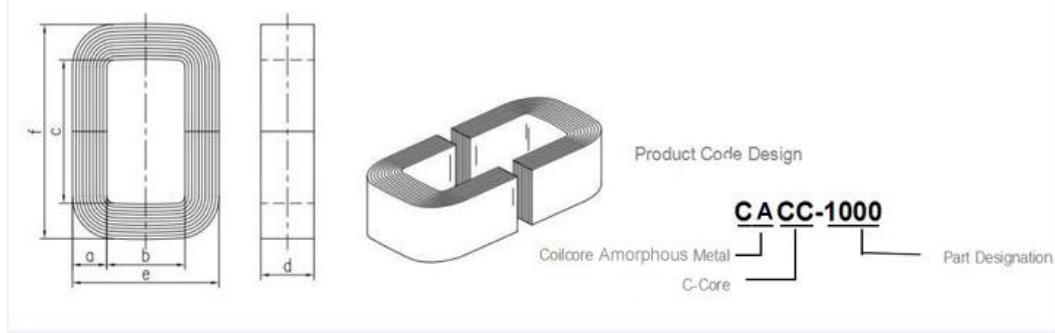

Core No.	Core Dimension										Performance Parameters				
	a(mm)	±	b(mm) ref*	c(mm) ref*	d(mm)	±	e(mm)	±	f(mm)	±	Im (cm)	Ac (cm ²)	Wa (cm ²)	Ap (cm ⁴)	Mass (g)
CACC-270	20.0	1.00	30.0	70.00	60.0	1.00	70.0	1.00	110.00	3.00	26.30	10.68	21.00	205.22	2015
CACC-275	25.0	1.00	35.0	78.00	50.0	1.00	85.0	1.00	128.00	3.00	30.106	11.125	27.30	277.90	2404
CACC-310	25.0	1.00	82.0	90.00	25.0	0.50	132.0	2.00	140.00	4.00	42.30	5.56	73.80	375.62	1687
CACC-320	22.0	1.00	35.0	85.00	50.0	1.00	79.0	1.00	129.00	4.00	30.60	9.79	29.80	266.50	2148
CACC-330	25.0	1.00	90.0	94.00	25.0	1.00	140.0	2.00	144.00	4.00	45.00	5.56	84.60	430.59	1796
CACC-340	26.0	1.00	80.0	104.00	30.0	0.50	132.0	1.00	156.00	4.00	45.00	6.94	83.20	528.48	2241
CACC-380	30.0	1.00	86.0	95.00	30.0	0.50	146.0	2.00	155.00	4.00	45.60	8.01	81.70	598.79	2624
CACC-400	22.0	1.00	35.0	85.00	65.0	1.00	79.0	1.00	129.00	4.00	30.40	12.73	29.80	346.44	2777
CACC-410	32.0	1.00	50.0	113.00	40.0	1.00	114.0	1.00	177.00	4.00	42.60	11.39	56.50	588.94	3488
CACC-415	22.0	1.00	46.0	72.00	80.0	1.00	90.0	1.00	116.00	3.00	29.30	15.66	33.10	474.69	3296
CACC-500	25.0	1.00	40.0	85.00	55.0	1.00	90.0	1.00	135.00	4.00	32.30	12.24	34.00	380.71	2841
CACC-630	25.0	1.00	40.0	85.00	70.0	1.00	90.0	1.00	135.00	4.00	32.30	15.58	34.00	484.54	3616
CACC-650	45.0	1.00	40.0	115.00	40.0	1.00	120.0	1.00	195.00	5.00	43.60	14.24	46.00	599.36	4454
CACC-800A	25.0	1.00	40.0	85.00	85.0	1.50	90.0	1.00	135.00	4.00	32.30	18.91	34.00	588.37	4391
CACC-800B	30.0	1.00	40.0	95.00	85.0	1.50	100.0	1.00	155.00	4.00	35.90	22.70	38.00	789.11	5851
CACC-1000	33.0	1.00	40.0	105.00	85.0	1.50	106.0	1.00	171.00	5.00	38.80	24.96	42.00	959.39	6963
CACC-1050	40.0	1.00	50.0	100.00	70.0	1.50	130.0	1.00	180.00	5.00	42.60	24.92	50.00	1140.09	7615
CACC1500	40.0	1.00	64.0	160.00	80.0	1.50	144.0	1.00	240.00	5.00	57.40	28.48	102.40	2668.46	11729
CACC-L1	8.0	0.50	14.0	31.00	40.0	1.00	30.0	1.00	47.00	1.50	11.20	2.85	4.30	11.31	215
CACC-L2	8.0	0.50	20.0	54.00	40.0	0.50	36.0	1.50	70.00	0.00	29.30	2.85	10.80	28.14	330
CACC-20	11.0	1.00	12.0	50.00	30.0	ref*	35.5	3.00	73.00	0.00	16.20	2.80	6.60	17.07	337
CACC-200	19.0	1.50	24.0	80.00	50.0	1.50	63.0	2.00	119.00	4.00	27.20	8.46	20.80	160.50	1600
CACC-25782540	24.7	1.00	25.0	78.00	40.0	0.50	75.0	Max.	128.60	Max.	28.10	8.80	19.50	172.00	1750
CACC-49	13.0	0.80	15.0	56.00	50.0	1.00	41.0	2.00	82.00	2.50	19.40	5.30	8.40	45.00	757
CACC-078128	28.0	1.00	78.0	128.00	120.0	1.50	134.0	2.00	184.00	4.00	49.30	29.30	99.80	2925.00	10581

Note: Customized is available.